

TYA3ECRC-S



Entyce Self-Service Multi-Deck Self-Contained, Island or End Display



ADVANTAGES

Exceptional Merchandising

with open, cascading product presentation.

Designed To Guide Your Shopper Around To See

Around to see everything and inspire impulse buying.

More Packout

High pack out in small footprint.

Adjustable Shelving System

Merchandising flexibility with vertical shelf height adjustments.

Product Temp Enhancement

Developed for more stringent ambient conditions - Balanced air distribution and advanced coil technology adjustments.



TYA3ECRC5X7ISPA



TYA3ECRC3X45ESPA



KEY FEATURES

Low GWP Refrigerant

Meets all regulatory requirements and complies with the AIM Act.

Energy Efficient

LED lighting increases energy efficiency.

Shortened Lead Times

Product now built on standard assembly line.



1.800.592.2060



www.hussmann.com

TYA3ECRC-S Entyce Self-Contained Island or End Displays

SHORTENED LEAD TIMES

- Product now built on standard assembly line

STANDARD

- Painted exterior - 701 Shadow Black
- 2" black vinyl cart bumper
- Radius tempered glass perimeter
- 3500K LED canopy lights - 5 year warranty
- Energy efficient fan motors
- R-454C Low GWP A2L refrigerant
- Evap pan-floor sink not required
- Designed for use in stores when temperature and humidity do not exceed 75°F / 55% RH (Type 1), or 80°F / 55% RH (Type 2)

OPTIONS

- Exterior top and bumper retainer - black
- Interior finish - black
- 10" and 12" shelves w/PTM (Island): black
- 10" (2 rows) shelves w/PTM (End): black
- Angled shelf insert - none or include
- 3500k LED shelf lights- none or include
- Deck: Black PTM: none or include
- Electrical connection: top mount or bottom mount
- Electrical conn. wiring: hardwired or cord and plug

TECHNICAL INFORMATION




Scan or click QR to access additional resources at hussmann.com

DIMENSIONS


Island

- 5'x7' (TY3ECRC5X7ISPA)

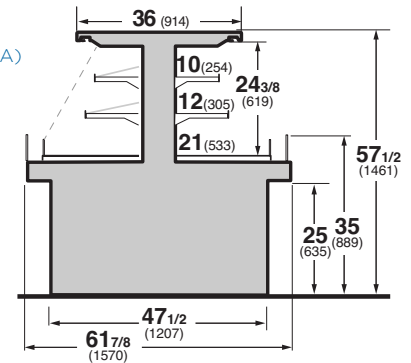


End Displays

- 3'x4.5' (TY3ECRC3X45ESPA)
- 3'x5.5' (TY3ECRC3X55ESPA)

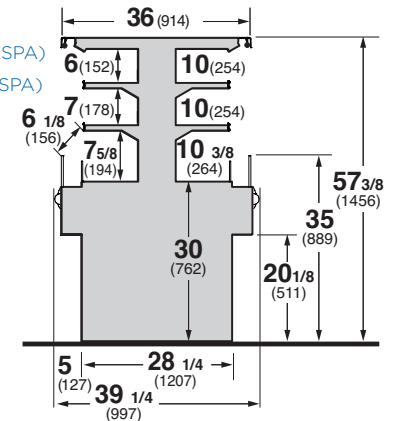

Note Dimension are in Inches (millimeters)



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

Model	L	D	H	Nom. HP	Ref.	Hz/Ph	Volts	Circuit Amps	Fuse Amps	NEMA Plug	Refrig. Load	A/C Load	(Approx.) Shipping Weight
TYA3ECRC5X7ISPA	85-5/8" (2175)	61-7/8" (1570)	57-1/2" (1461)	2-1/2	R-454C	60/1	208	35.1 A	50 A	L14-50P	21280 BTU/h	25983 BTU/h	1200
TYA3ECRC3X45ESPA	56" (1422)	39-1/4" (997)	57-1/8" (1451)	1-1/2	R-454C	60/1	208	21 A	30 A	L14-30P	11600 BTU/h	15350 BTU/h	800
TYA3ECRC3X55ESPA	69-3/8" (1762)	39-1/4" (997)	57-1/8" (1451)	1-3/4	R-454C	60/1	208	26.1 A	40 A	L14-50P	13680 BTU/h	18612 BTU/h	900



NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75° F (23.9° C) and 55% R.H.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

Use Hussmann's technical data sheets to get dimensions for all store layout purposes.

For additional resources, contact your representative or visit www.hussmann.com.



Hussmann Corporation
12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
Ph: 1.800.592.2060

www.hussmann.com