


SELF-SERVICE DELI & MEAT
HUSSMANN - Q2-SS-R / Q2-SSM-R ADJUSTABLE FRONT

REVISION DATE 11/19/21

DOE 2017 Energy Efficiency Compliant Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

ADJUSTABLE MEAL KIT / MEAT / SUSHI

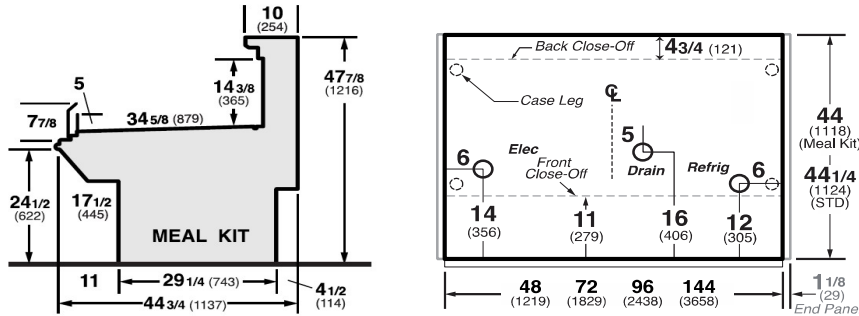

REFRIGERATION DATA:

CASE LENGTHS/ WEDGES	CASE USAGE	CAPACITY *** (BTU/HR/FT) (TOTAL FOR WEDGES)		TEMPERATURE (°F)			VELOCITY (FT/MIN)
		RATING CONDITION		EVAPORATOR		DISCHARGE AIR ** (°F)	
		NSF 7	AHRI 1200	NSF 7	AHRI 1200	NSF 7	
4', 6', 8', 12'	ADJUSTABLE DELI	600	600	22	22	28~34	170 ~ 250
	ADJUSTABLE MEAT/SUSHI	640	640	20	20	26~32	170 ~ 250

CASE LENGTH	EST. REFG. CHRG. 404a (LBS)	GLYCOL (20°F INLET, 6° RISE)		GLYCOL (20°F INLET, 6° RISE) REAR STORAGE	
		GPM	PSI	GPM	PSI
4'	0.5	0.9	2.4	0.1	0.0
6'	0.7	1.4	5.4	0.2	0.2
8'	1.0	1.8	2.5	0.3	0.4
12'	1.5	2.6	5.1	0.4	0.8

**FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB; REAR STORAGE MEASURED AT EXIT TO COIL

***REFRIGERATION NOTES:

- 1) BTU'S DO NOT INCLUDE LIGHTS
- 2) AHRI 1200 RATING POINT FOR ENERGY CONSUMPTION COMPARISON ONLY
- 3) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT. ADJUST EVAPORATOR PRESSURE AS NEEDED TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SHOWN.
- 4) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

REFRIGERATION DATA CONTINUED:

CASE	ELEC. THERMOSTAT / AIR SENSOR SETTINGS			DEFROST TYPE	TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) COIL ONLY	DRIP TIME	DEFROST WATER (LBS/DAY/FT)
	USAGE	CUT IN (°F)	CUT OUT (°F)						
4', 6', 8', 12'	ADJUSTABLE DELI	31	29	OFF	25	6	48	N/A	2.7
	ADJUSTABLE MEAT/SUSHI	30	28	TIME			45		2.9

END PANEL WIDTH KEY		
# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

ELECTRICAL DATA: STANDARD FANS, HEATERS, LED LIGHTS (120 VOLT)

CASE LENGTH	USAGE	EVAPORATOR FANS; SELF-SERVICE SECTION				ANTI-SWEAT HEATERS		
		# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH (°)	AMPS	WATTS	AMPS	WATTS
4'	DELI / MEAT / SUSHI	2	6.7	25	0.24	16	0.17	20
6'		4	6.7	25	0.48	32	0.25	30
8'		4	6.7	25	0.48	32	0.33	40
12'		6	6.7	25	0.72	48	0.50	60